



SPECIFICATION

Item No.: T60404-P4640-X154

K-No.: 26432	1000 A Current Sensor for ±24V- Supply Voltage for electric current measurement: DC, AC, pulsed, mixed ..., with a galvanic isolation between primary circuit (high power) and secondary circuit (electronic circuit)	Date: 25.11.2016
--------------	--	------------------

Customer: Standard Type	Customer part no.:	Page 1 of 6
-------------------------	--------------------	-------------



Electrical data

I _{PN}	Primary nominal r.m.s. current	1000	A
R _M ¹	Measuring resistance	0 ... 100	Ω
I _{SN}	Secondary nominal r.m.s. current	200	mA
K _N	Turns ratio	(1): 5000	

¹ connected to sensor output, R_M for I_{P,max} see fig. 1 on page 2

Accuracy – Dynamic performance data

		min.	typ.	max.	Einheit
I _{P,max} ²	Max. measuring range @ R _M = 10 Ω; T _A = 25°C @ R _M = 10 Ω; T _A = 85°C	2500	-	-	A
X	Accuracy @ I _{PN} , T _A = -40 ... +85°C	2150	-	-	A
ε _L	Linearity	-	-	0.1	%
I ₀	Offset current @ I _P =0, T _A = 25°C	-	-	0.1	mA
I _{OH}	Hysteresis current	-	-	0.1	mA
t _r	Response time @ 80% of I _{PN}	-	< 1	-	μs
t _{ra}	Reaction time @ 10% of I _{PN} (di/dt = 1200 A/μs)	-	-	1	μs
f _{BW}	Frequency bandwidth	DC...100	-	-	kHz

² currents with high slew rates can be measured above I_{P,max} (transformer behavior)

General data

		min.	typ.	max.	Einheit
θ _A	Ambient operating temperature	-40	-	+85	°C
θ _S	Ambient storage temperature	-40	-	+85	°C
m	Mass	-	550	-	g
U _C	Supply voltage	±21.60	±24	±25.2	V
I _{CO}	Current consumption for I _P = 0A	-	27	-	mA
I _{CN}	Current consumption for I _{PN} = 1000A	-	190	-	mA
* S _{clear}	Clearance	20	-	-	mm
* S _{creep}	Creepage	20	-	-	mm
* U _{sys}	System voltage (determines impulse voltage acc. table 7)	-	-	1000	V _{RMS}
* U _{AC}	Working voltage (acc. U _{ACL} as limit in table 3)	-	-	1000	V _{RMS}
* U _{PD}	Rated discharge voltage (acc. table 24 with U _{PD} =U _{ACP})	-	-	1414	V _{peak}
	Max. potential difference acc. to UL 508	-	-	1000	V _{rms}

* Constructed and manufactured and tested in accordance with EN 61800-5-1:2007 (Pin 1 - 3 to primary opening)

Reinforced insulation, Insulation material group 1, Pollution degree 2, Overvoltage category III

Datum	Name	Index	Änderung
25.11.16	Ku	82	Typo: Page 2, Table 55°C/1Ω/2880A changed Dwell time from <10min to <3min. minor change.
29.06.16	Ku.	82	Sensor optimized. CN-15-732
Hrsg.: MC-PD editor	Bearb: Ku. designer	MC-PM: KRe. check	freig.: BEF released

Weitergabe sowie Vervielfältigung dieser Unterlage, Verwertung und Mitteilung ihres Inhalts nicht gestattet, soweit nicht ausdrücklich zugestanden. Zu widerhandlungen verpflichten zu Schadenersatz. Alle Rechte für den Fall der Patenterteilung oder GM-Eintragung vorbehalten
Copying of this document, disclosing it to third parties or using the contents there for any purposes without express written authorization by use illegally forbidden.
Any offenders are liable to pay all relevant damages.

K-No.: 26432

1000 A Current Sensor for $\pm 24\text{V}$ - Supply Voltage

for electric current measurement:

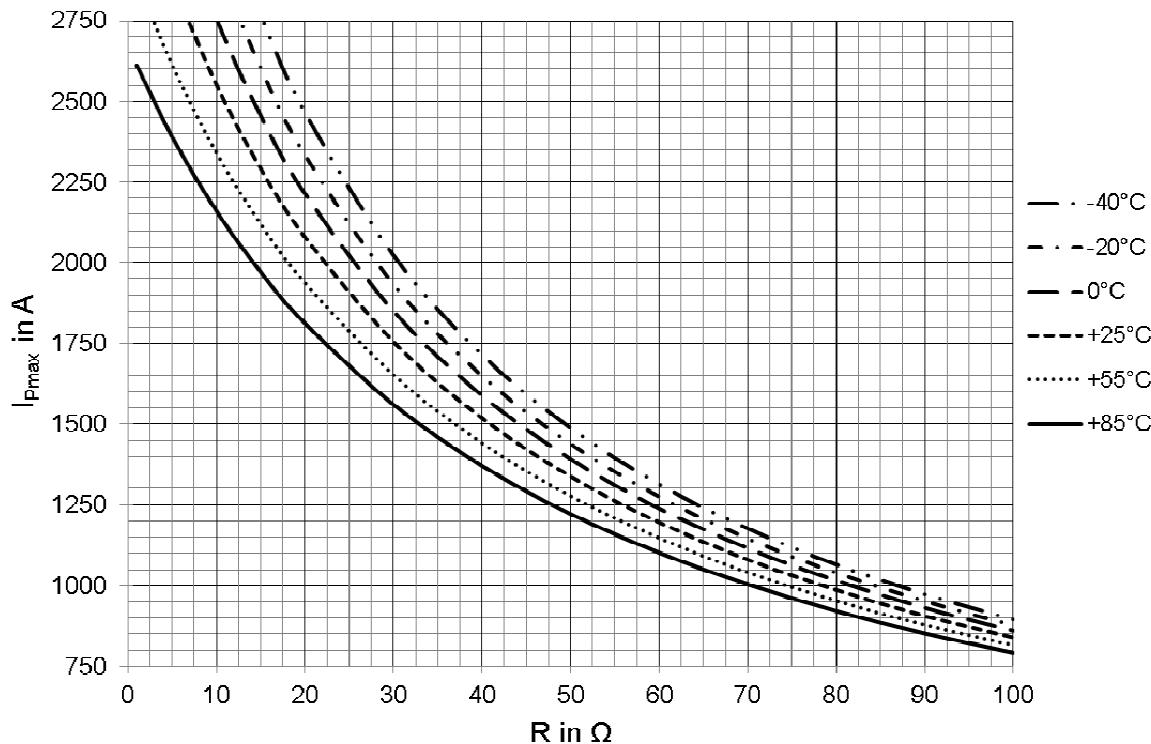
DC, AC, pulsed, mixed ..., with a galvanic isolation between primary circuit (high power) and secondary circuit (electronic circuit)

Date: 25.11.2016

Customer: Standard Type

Customer part no.:
Page 2 of 6
Capability of the sensor for measuring max. peak currents at defined temperatures.
values for supply voltage $\pm 22.80\text{ V}$ ($\pm 24\text{ V}$ -5 %):

ϑ_A	55 °C	55 °C	55 °C	55 °C	85°C	85°C	85°C	85°C
R_M	1 Ω	5 Ω	20 Ω	50 Ω	1 Ω	5 Ω	20 Ω	50 Ω
$I_{P,\max}$	2880A	2610A	1930A	1270A	2610A	2390A	1810A	1220A
Dwell time	< 3min	< 10min	< 10min	< 30min	< 3min	< 3min	< 3min	< 15min

Limit curve of measurable current $\hat{I}_P=f(R_M)$ Values for supply voltage $\pm 22.80\text{ V}$ ($\pm 24\text{ V}$ -5 %)

Fig. 1: $I_{P,\max} = f(R_M)$ @ ϑ_A
Absolute maximum conditions:

ϑ_A	$\leq 70\text{ °C}$	$70\text{ °C} < \vartheta_A \leq 85\text{ °C}$
$I_P = I_{P,\max}$ up to	1800 A DC	1200 A DC

Stresses above these conditions may cause permanent damage. Exposure to absolute maximum rating conditions for extended periods will degrade device reliability and lifetime expectancy. Functional operation of the device at these or any other conditions beyond those specified in this specification is not permitted.

Hrsg.: MC-PD editor	Bearb: Ku. designer	MC-PM: KRe. check			freig.: BEF released
------------------------	------------------------	----------------------	--	--	-------------------------

Weitergabe sowie Vervielfältigung dieser Unterlage, Verwertung und Mitteilung ihres Inhalts nicht gestattet, soweit nicht ausdrücklich zugestanden. Zu widerhandlungen verpflichten zu Schadenersatz. Alle Rechte für den Fall der Patenterteilung oder GM-Eintragung vorbehalten

Copying of this document, disclosing it to third parties or using the contents there for any purposes without express written authorization by use illegally forbidden.
Any offenders are liable to pay all relevant damages.

K-No.: 26432	1000 A Current Sensor for $\pm 24V$ - Supply Voltage for electric current measurement: DC, AC, pulsed, mixed ..., with a galvanic isolation between primary circuit (high power) and secondary circuit (electronic circuit)	Date: 25.11.2016
Customer: Standard Type	Customer part no.:	Page 3 of 6

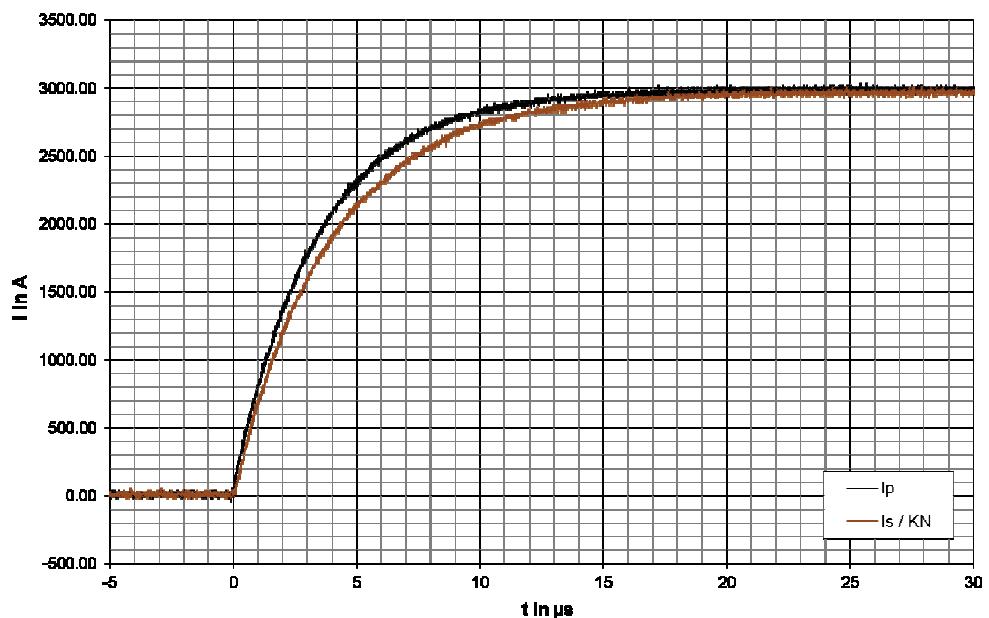
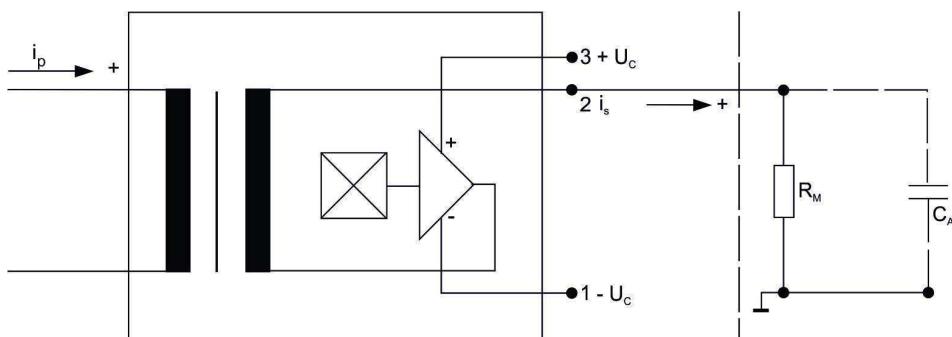
Overload pulse (us-range)


Fig. 2: Output current reaction of a 3kA current pulse with $R_M = 10\Omega$

Schematic diagram:


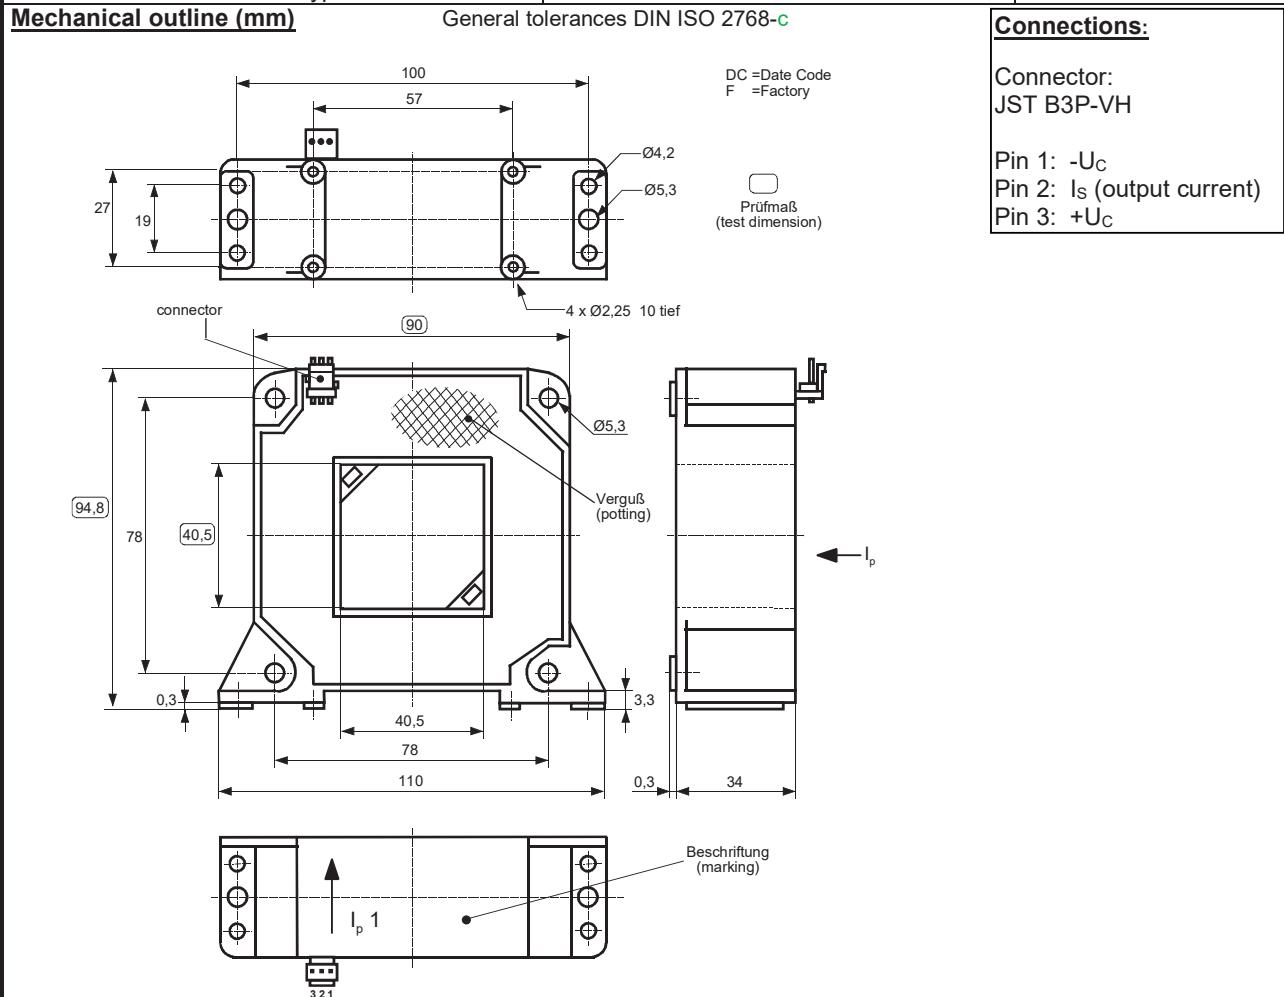
The polarity of the supply voltage is very important!
With the wrong polarity, the current sensor will be damaged after a few seconds!

Hrsg.: MC-PD editor	Bearb: Ku. designer		MC-PM: KRe. check			freig.: BEF released
Weitergabe sowie Vervielfältigung dieser Unterlage, Verwertung und Mitteilung ihres Inhalts nicht gestattet, soweit nicht ausdrücklich zugestanden. Zu widerhandlungen verpflichten zu Schadenersatz. Alle Rechte für den Fall der Patenterteilung oder GM-Eintragung vorbehalten						

Copying of this document, disclosing it to third parties or using the contents there for any purposes without express written authorization by use illegally forbidden.
Any offenders are liable to pay all relevant damages.

K-No.: 26432	1000 A Current Sensor for ±24V- Supply Voltage for electric current measurement: DC, AC, pulsed, mixed ..., with a galvanic isolation between primary circuit (high power) and secondary circuit (electronic circuit)	Date: 25.11.2016
--------------	--	------------------


Customer: Standard Type	Customer part no.:	Page 4 of 6
-------------------------	--------------------	-------------



Marking

Explanation: Item number: see Tab.2 (left column)
F = Factory code
DC = Date code

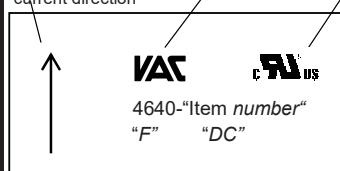Arrow shows positive current direction
VAC logo
UL logo



Example: Sensor with end number X152

Produced in Slovakia in April 2015

- Part number: 4640-X152
- Factory code: SK
- Date code: F4



Hrsg.: MC-PD editor	Bearb: Ku. designer	MC-PM: KRe. check	freig.: BEF released
------------------------	------------------------	----------------------	-------------------------

Weitergabe sowie Vervielfältigung dieser Unterlage, Verwertung und Mitteilung ihres Inhalts nicht gestattet, soweit nicht ausdrücklich zugestanden. Zuwiderhandlungen verpflichten zu Schadenersatz. Alle Rechte für den Fall der Patenterteilung oder GM-Eintragung vorbehalten

Copying of this document, disclosing it to third parties or using the contents there for any purposes without express written authorization by use illegally forbidden.
Any offenders are liable to pay all relevant damages.



SPECIFICATION

Item No.: T60404-P4640-X154

K-No.: 26432	1000 A Current Sensor for ±24V- Supply Voltage for electric current measurement: DC, AC, pulsed, mixed ..., with a galvanic isolation between primary circuit (high power) and secondary circuit (electronic circuit)	Date: 25.11.2016
Customer: Standard Type	Customer part no.:	Page 5 of 6

Offset ripple reduction

The offset ripple can be reduced by an external low pass. The simplest solution is a passive low pass filter of 1st order by connecting a capacitor parallel to the burden resistor R_M as shown on page 3. The required capacitance can be calculated as follows:

$$C_a = \frac{1}{2\pi \cdot R_M \cdot f_g}$$

In this case the response time is enlarged. It is calculated from:

$$t'_r \geq t_r + 2,5 R_M C_a$$

Routine Test¹⁾ (Measurement after temperature balance of the samples at room temperature; SC = significant characteristic)

$K_N(N_1/N_2)$	(100%) M3011/6	Transformation ratio ($I_{PN}=3\pm 1000A$, 40-80 Hz)	1 : 5000 ± 0.4	% (SC)
I_0	(100%) M3226	Offset current	< 0.1	mA (SC)
U_P	(100%) M3014	Test voltage (1s) Pin 1 - 3 to primary opening	(RMS)	2.2 kV (SC)
U_{PDE}	(AQL 1/S4)	Partial discharge voltage (extinction)	(RMS)	1500 V
$U_{PD(rms)} \cdot 1.875$		*acc. table 24	(RMS)	1875 V

Type Test (Pin 1 - 3 to primary opening)

U_W	M3064	HV transient test, *acc. table 18, 19 (1.2 µs / 50 µs-wave form)	12	kV
U_P	M3014	Test voltage (5s)	(RMS)	6 kV
U_{PDE}		Partial discharge voltage (extinction)	(RMS)	1500 V
$U_{PD(rms)} \cdot 1.875$		*acc. table 24	(RMS)	1875 V
ESD	EN 61000-4-2	contact / surface	±8 / ±15	kV

* IEC 61800-5-1:2007.

Applicable documents

Constructed and manufactured and tested in accordance with EN 61800-5-1:2007

Further standards: UL 508 ; file E317483, category NMTR2 / NMTR8

Hrsg.: MC-PD editor	Bearb: Ku. designer	MC-PM: KRe. check			freig.: BEF released
Weitergabe sowie Vervielfältigung dieser Unterlage, Verwertung und Mitteilung ihres Inhalts nicht gestattet, soweit nicht ausdrücklich zugestanden. Zuwiderhandlungen verpflichten zu Schadenersatz. Alle Rechte für den Fall der Patenterteilung oder GM-Eintragung vorbehalten		Copying of this document, disclosing it to third parties or using the contents there for any purposes without express written authorization by use illegally forbidden. Any offenders are liable to pay all relevant damages.			

K-No.: 26432	1000 A Current Sensor for ±24V- Supply Voltage for electric current measurement: DC, AC, pulsed, mixed ..., with a galvanic isolation between primary circuit (high power) and secondary circuit (electronic circuit)	Date: 25.11.2016
Customer: Standard Type	Customer part no.:	Page 6 of 6

Explanation to parameters used in this datasheet
Accuracy

$X_{\text{total}}(I_{\text{PN}})$: The sum of all possible errors over the temperature range by measuring a current I_{PN} :

$$X_{\text{total}} = 100 \cdot \left| \frac{I_s(I_{\text{PN}})}{K_N \cdot I_{\text{PN}}} - 1 \right|$$

X : Permissible measurement error in the final inspection at RT.
 I_{SB} is the DC output current for a DC primary current with the same value as the (positive) rated current I_{PN} (with $I_0 = 0$)

$$X = 100 \cdot \left| \frac{I_{\text{SB}}}{I_{\text{SN}}} - 1 \right|$$

X_{Ti} : Temperature drift of the rated value orientated output term.
 I_{SN} (cf. Notes on F_i) in a specified temperature range:
 I_{SB} is the secondary current at temperature ϑ_{A1} or ϑ_{A2}

$$X_{\text{Ti}} = 100 \cdot \left| \frac{I_{\text{SB}}(\vartheta_{A2}) - I_{\text{SB}}(\vartheta_{A1})}{I_{\text{SN}}} \right|$$

ε_L : Linearity fault where I_p is any input DC and I_{sx} the corresponding output term. ($I_0 = 0$).

$$\varepsilon_L = 100 \cdot \left| \frac{I_p}{I_{\text{PN}}} - \frac{I_{sx}}{I_{\text{SN}}} \right|$$

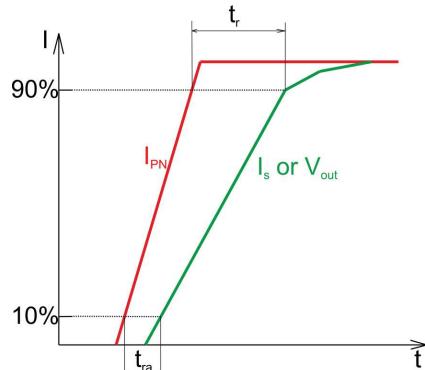
Offset and drift

I_{OH} : Zero variation after overloading with a DC of tenfold the rated value ($R_M = R_{MN}$)

I_{ot} : Long term drift of I_0 after 100 temperature cycles in the range -40 to 85 °C.

Dynamic properties

t_{ra} : Reaction time, measured as a delay time between a rectangular primary current ($di/dt \approx 1200A/\mu s$) and the output current I_s at $I_p = 0.1 * I_{\text{PN}}$



t_r : Response time, measured as a delay time between a rectangular primary current and the output current I_s at $I_p = 0.9 * I_{\text{PN}}$

Voltage ratings (according to IEC 61800-5-1:2007)

U_{PD} : Rated discharge voltage (recurring peak voltage separated by the insulation)

U_{sys} : System voltage: RMS value of rated voltage

U_{AC} : Working voltage: RMS voltage which occurs by design in a circuit or across an insulation

Hrsg.: MC-PD editor	Bearb: Ku. designer	MC-PM: KRe. check			freig.: BEF released
Weitergabe sowie Vervielfältigung dieser Unterlage, Verwertung und Mitteilung ihres Inhalts nicht gestattet, soweit nicht ausdrücklich zugestanden. Zuwiderhandlungen verpflichten zu Schadenersatz. Alle Rechte für den Fall der Patenterteilung oder GM-Eintragung vorbehalten		Copying of this document, disclosing it to third parties or using the contents there for any purposes without express written authorization by use illegally forbidden. Any offenders are liable to pay all relevant damages.			